
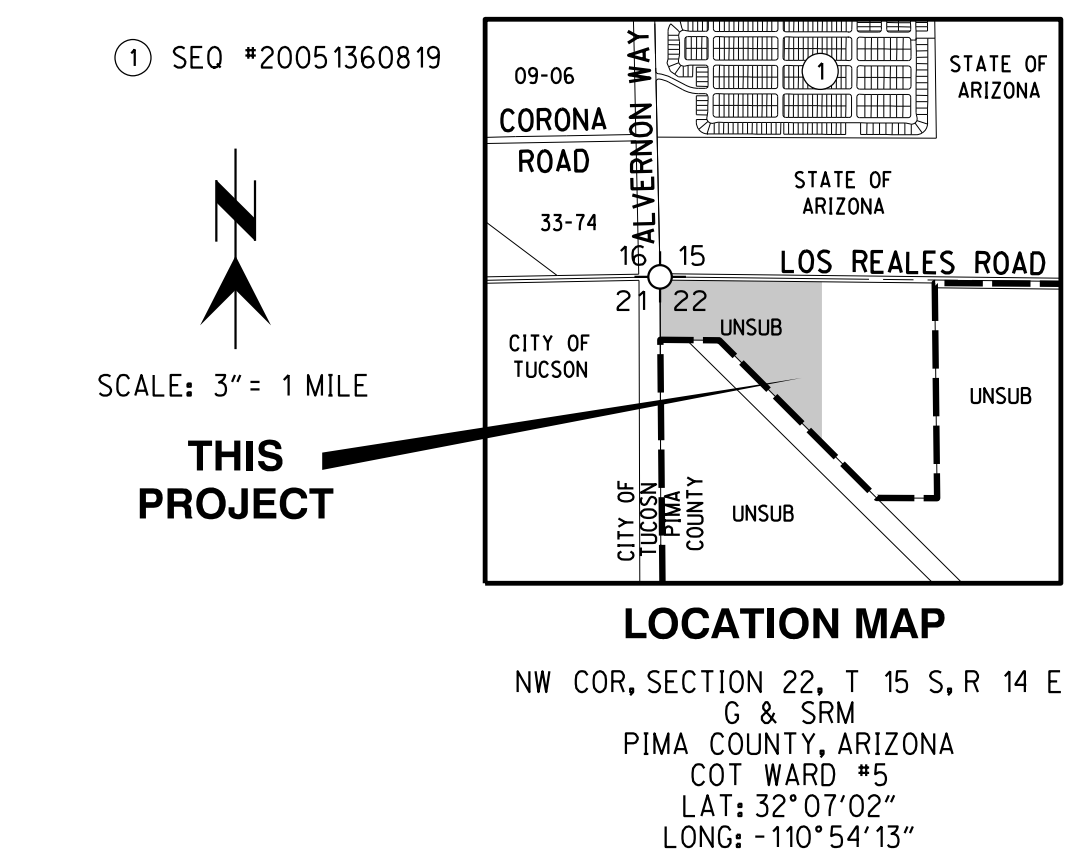
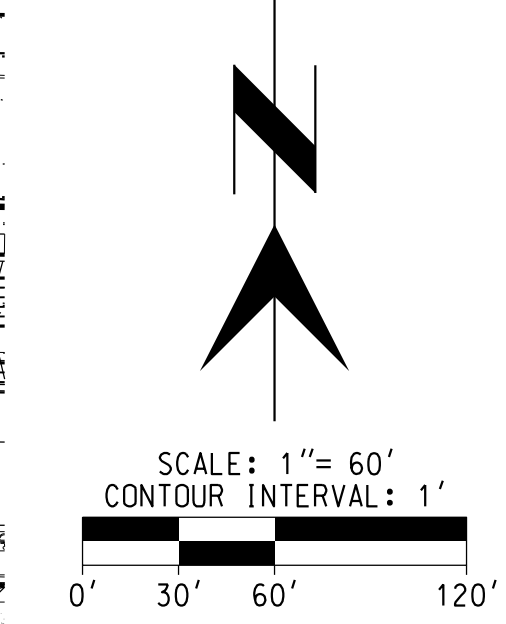


© 2022 Rick Engineering Company

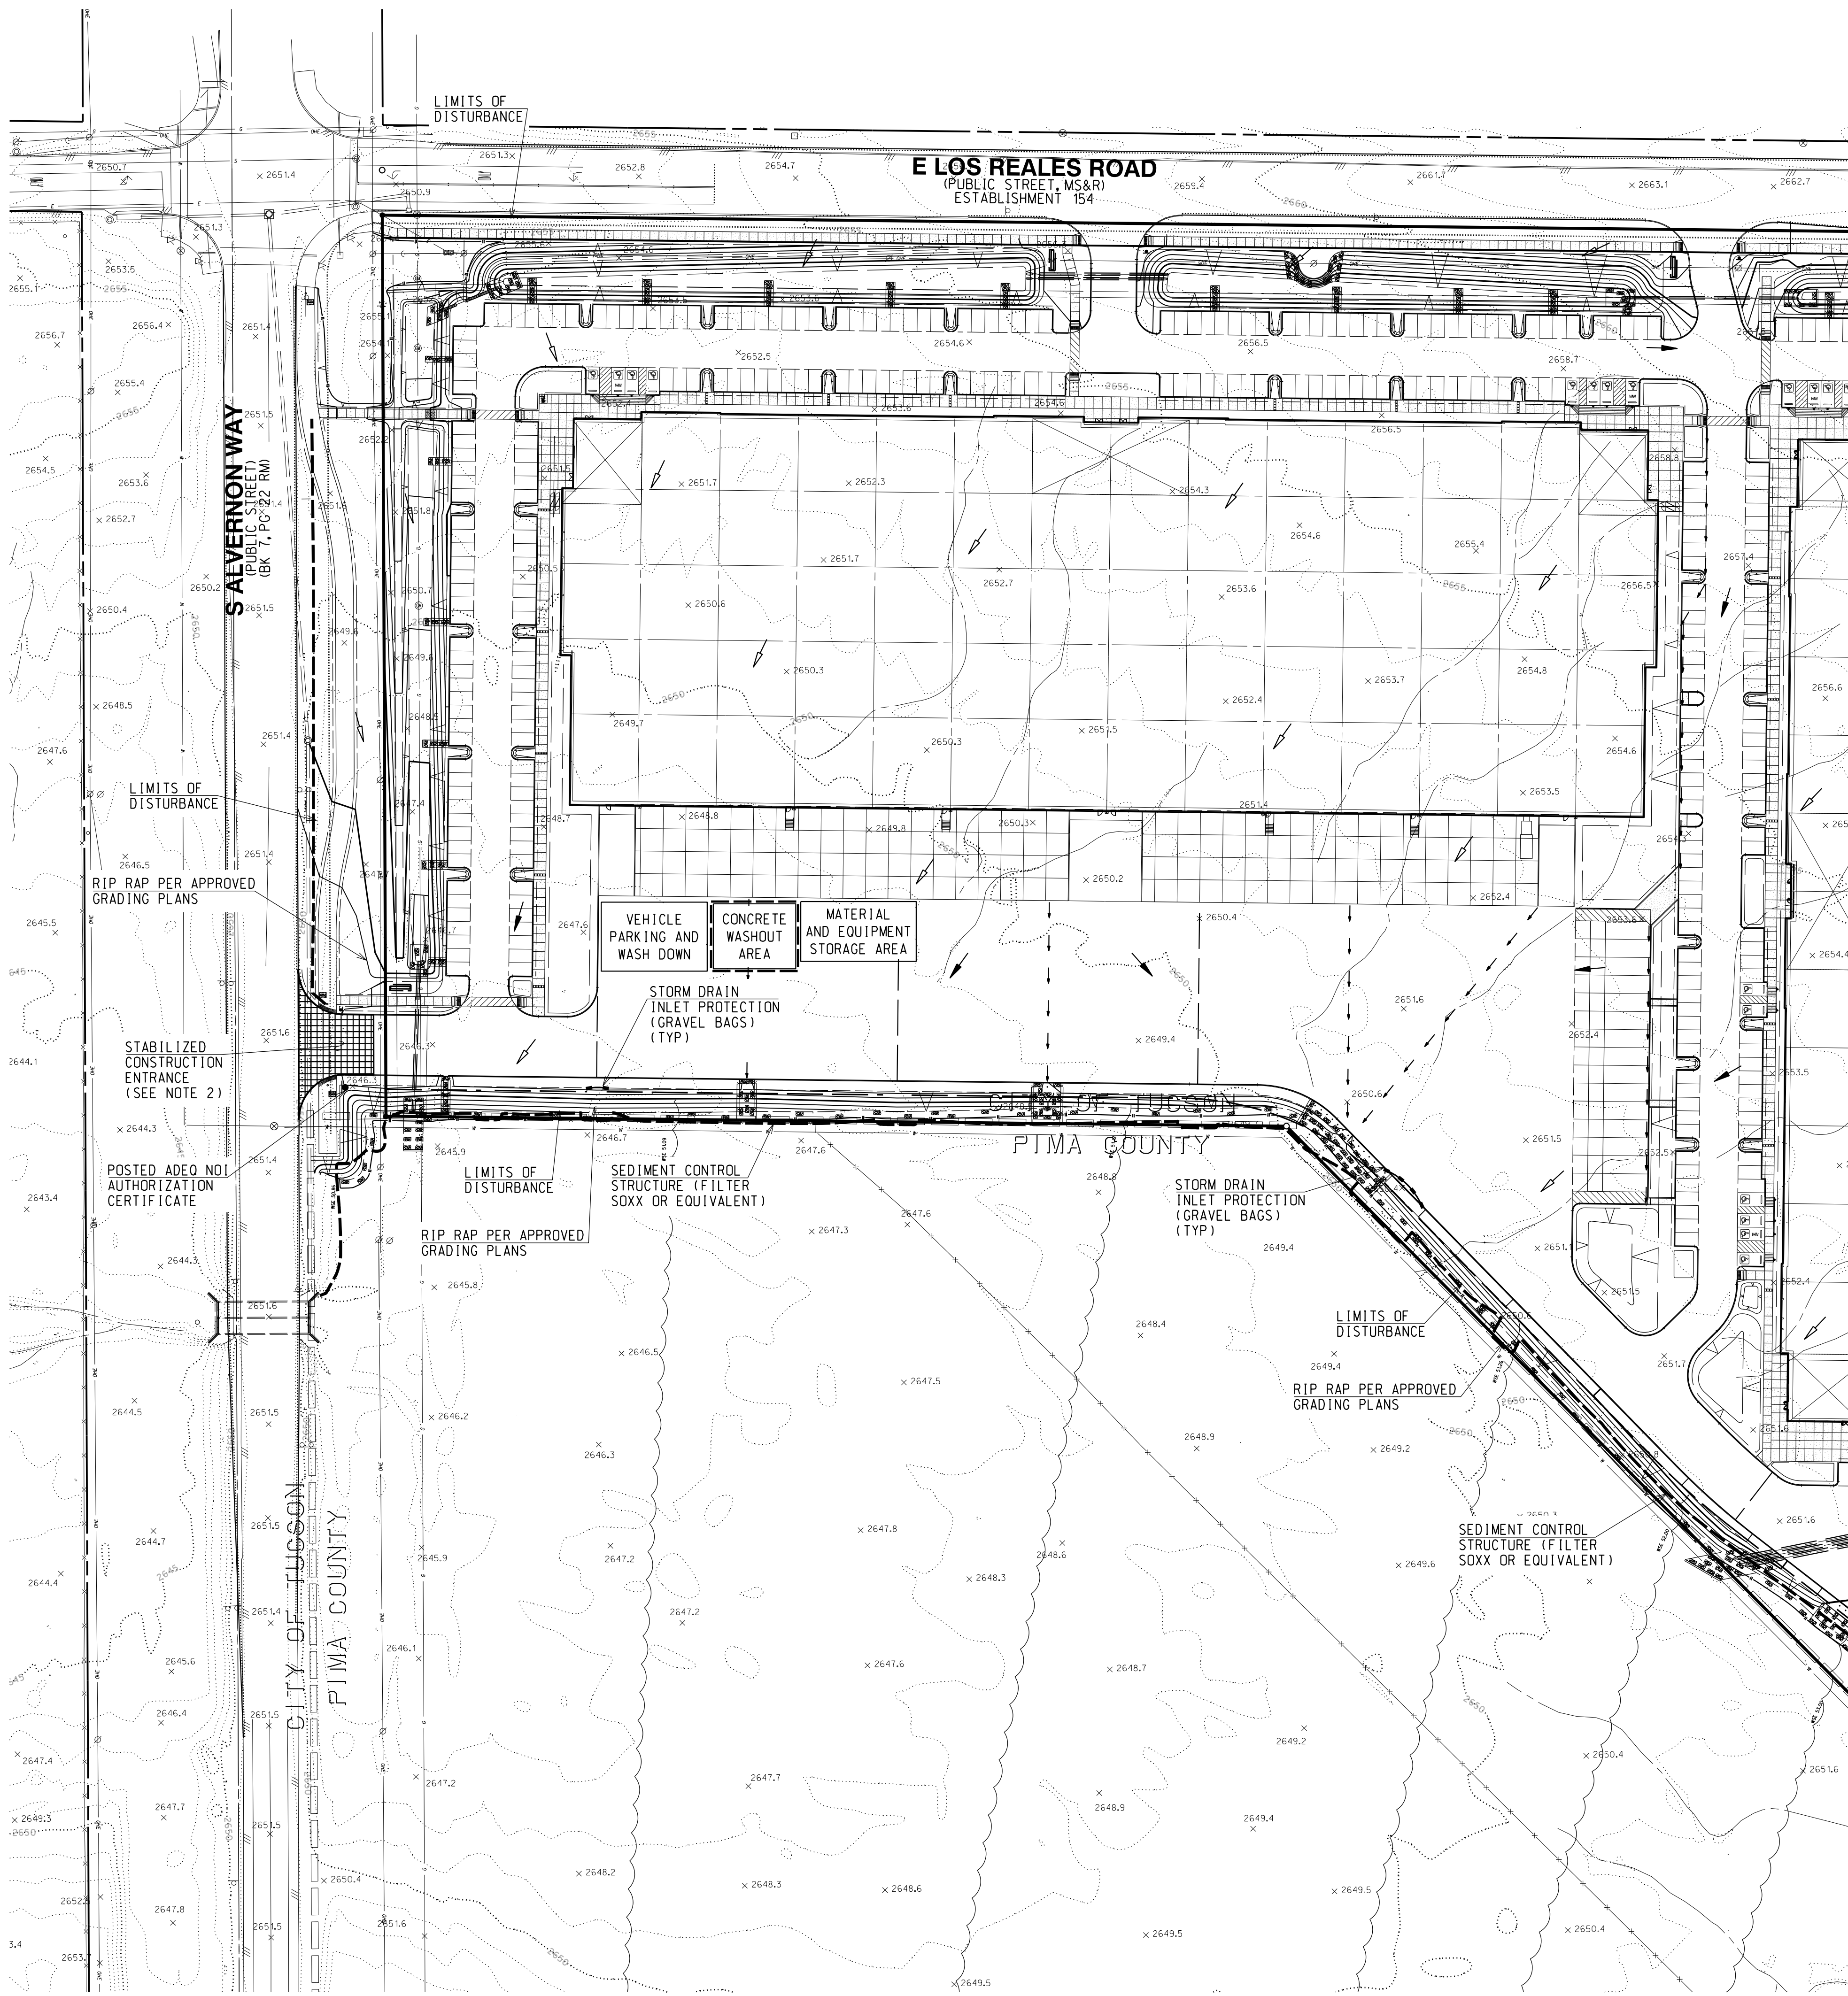

- LEGEND**
- STABILIZED CONSTRUCTION ENTRANCE (SEE SECT. 4.3.2 & APPENDIX I)
 - SEDIMENT CONTROL STRUCTURE (SEE SECT. 4.1.0 - 4.1.2, & APPENDIX I)
 - STORM DRAIN INLET PROTECTION (SEE SECT. 4.1.2 & APPENDIX I)
 - LIMITS OF DISTURBANCE
 - PROPOSED STORMWATER FLOW
 - EXIST STORMWATER FLOW
 - HIGH POINT PER APPROVED GRADING PLANS
 - LOW POINT PER APPROVED GRADING PLANS

NOTE: IN THE EVENT OF A SPILL, THE OPERATOR SHALL REPORT ANY NONCOMPLIANCE TO ADEQ AT (602) 771-2330 OR FAX (602) 771-4505. REFER TO SECTION 7 OF THE REPORT FOR FURTHER GUIDANCE.

TOTAL AREA OF DISTURBANCE: 79.99 AC
RECEIVING WATERS

1. TRIBUTARY TO AIRPORT WASH

STORMWATER POLLUTION CONTROL NOTES

1. CONTRACTOR TO DELINEATE GRADING LIMITS BY FLAGGING SITE AT 100' INTERVALS.
2. STABILIZATION CONSTRUCTION ENTRANCE SHALL BE 30 FT WIDE, 50 FEET LONG AND 6 INCHES DEEP. (SEE APPENDIX K FOR DETAILS.)
3. ALL DESIGNATED AREAS SUBJECT TO CHANGE ARE TO BE LOCATED AND SHOWN ON FIGURE 4-1 BEFORE START OF CONSTRUCTION ACTIVITY.
4. EROSION CONTROL PLAN, FIGURE 4-1, SHALL BE UPDATED AFTER EVERY INSPECTION.
5. THE INSPECTION SCHEDULE TO BE FOLLOWED IS LOCATED IN SECTION 7.0 OF THE SWPPP, AND SHOULD BE FILLED OUT AS START OF CONSTRUCTION ACTIVITIES.
6. NO OFFSITE STORAGE AREAS ARE REQUIRED FOR THIS SITE.
7. VEHICLE WASHDOWN AND CONCRETE WASHOUT PER SEPARATE PERMIT. SEE SECTION 4.3 & APPENDICES C & D.
8. AT THE TIME THIS SWPPP WAS PREPARED, NO AREAS HAVE ACHIEVED FINAL STABILIZATION WITHIN THE LIMITS OF DISTURBANCE.

- NOTE: NO VEGETATIVE BUFFER ZONES OR ENVIRONMENTALLY SENSITIVE AREAS EXIST ON SITE. EXIST VEGETATION WILL BE TRANSPLANTED TO AN ON SITE LOCATION. SEE NPPO FOR DETAILS.
- NOTE: NO DRYWELLS EXIST ON SITE. AND NO DRYWELLS ON THE ADJACENT PROPERTIES HAVE POTENTIAL FOR RECEIVING STORMWATER FROM THIS SITE.
- NOTE: GRAVEL BAGS AT SCUPPER INLETS ARE TO BE REMOVED UPON COMPLETION OF THE PAVING.
- NOTE: NO SURFACE WATER BODIES (INCLUDING WETLANDS, EPHEMERAL WATERS, AND DRY WASHES) EXIST ON SITE. THE RECEIVING WATER IS APPROXIMATELY 0.8 MILES WEST.

NO. BY DATE		REVISION		APPR DATE	
J-4329A 3945 EAST FORT LOWELL ROAD - SUITE 111 TUCSON, AZ 85712 329/595-1000 rickengineering.com San Diego - Riverside - Orange - Sacramento - San Jose - Phoenix - Denver					
DESIGNED BY: THM	DATE: 04/2022	CHECKED BY: PJI	DATE: 04/2022	APPROVED BY: PJI	DATE: 04/2022
DRAWN BY: PAD	DATE: 04/2022				
STORMWATER POLLUTION PREVENTION PLAN I-10 INTERNATIONAL 4150 EAST LOS REALES ROAD, TUCSON, AZ 85756 A PORTION OF THE NORTHWEST QUARTER OF SECTION 22, TOWNSHIP 15 SOUTH, RANGE 14 EAST, GLA & SALT RIVER MERIDIAN, CITY OF TUCSON, PIMA COUNTY, ARIZONA.					
Contact Arizona 811 at least two full working days before you begin excavation Call 811 or click Arizona811.com					
DP22-0122 C15-22-01					
SCALE		HORIZ : 1" = 60' VERT : N/A			
SHEET 55 OF 86		13-DEC-2022 14:38			